



LED-D18X
IP44

LED DOWNLIGHTS



HIGH CRI >80
Technology SMD


DESCRIPTIONS

The D18X is a Recessed LED downlight series with high quality die-cast aluminum body in powder-coated, equipped with wide anti-glare, wide beam opal diffuser, available in different color temperature option. Excellent heat sink capability to minimize the luminous degradation, remote LED driver.

APPLICATIONS


General lighting, residential etc.

PHOTOMETRIC DATA

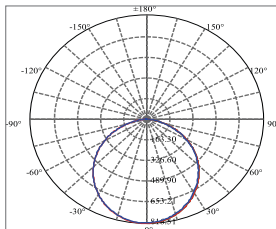

LED-D185-30W

DIMENSIONS

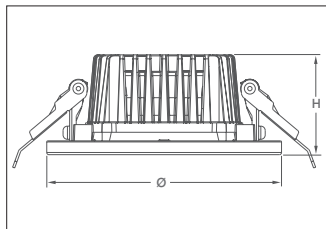

SPECIFICATIONS


Mounting	Ceiling recessed
LED module type	SMD LEDs
Voltage rating/ freq.	220-240V / 50-60 Hz
Driver	Electronic LED driver
Power factor	>0.95
Degree of protection	IP 44
Light controller	Opal PMMA diffuser
Available Color temp.	3000K/4000K/6500K
Operating temperature	-10 : 40°C
Rated lifetime (L70)	50,000 Hrs (@25C°)

CODE	Wattage	Lumin	IP Rate	Color Temp.		Ø	H
LED-D181-10W	10W	900LM	IP44	3K/4K/6.5K	125	138	49
LED-D182-15W	15W	1350LM	IP44	3K/4K/6.5K	135	156	51
LED-D183-18W	18W	1620LM	IP44	3K/4K/6.5K	175	194	52
LED-D184-24W	24W	2160LM	IP44	3K/4K/6.5K	215	229	52
LED-D184-30W	30W	2700LM	IP44	3K/4K/6.5K	215	229	52

OPTIONS:

- Dimmable Driver 1 - 10 / DALI
- Backup Emergency Kit 1H/3H
- Other Colour Temp.: 3000k/4000k/6000k
- Frosted / Semi frosted glass diffuser

MOUNTING SYSTEM

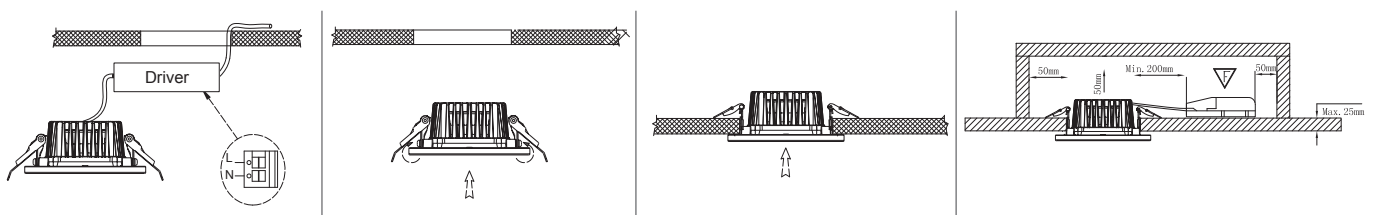

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700
Fax: +966 11 4789 469

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com