



LED - D13X
IP65



LED SPOTLIGHTS



HIGH
CRI >80



Technology COB


DESCRIPTIONS

The D13X is a waterproof recessed mounted LED downlight series with die-cast aluminium body in powder coating widely applied in canopy, out door courtyard. By using high efficiency and low energy consumptions and long life COB LEDs with IP 65 these futures make it heavy duty unique series for wet locations.

APPLICATIONS


Canopy, ceiling of indoor swimming rooms and other similar applications

PHOTOMETRIC DATA

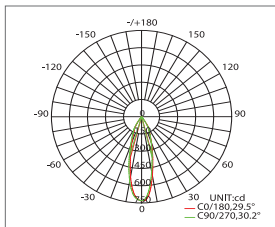

30°

DIMENSIONS

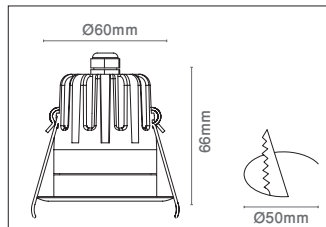

SPECIFICATIONS


Housing	Die casted aluminum with anti UV powder coating
LED module type	COB LED chips
Voltage rating/ freq.	220-240V / 50-60 Hz
Driver	Electronic LED driver (Tridonic, elt, TCI)
Beam Angle	20°/25°/30° (40°, 60° on request)
Light output	600LM / 630LM / 690LM
Degree of protection	IP 65
Light controller	Polycarbonate / Glass
Available Color temp.	3000K/4000K/6000K
Rated lifetime (L70)	50,000 Hrs (@25C°)

CODE	Wattage	Lumin	IP Rate	Color Temp.	Driver	Ø	H
LED-D132 - 7 W	7W	2900LM	IP65	3K/4K/6.5K	50	60	66

OPTIONS:

- 1 Dimmable LED driver 1-10V (DIM)
- 2 Dimmable DALI LED driver (DALI)
- 3 Emergency backup kit 90 min (EM 1.5)

MOUNTING SYSTEM

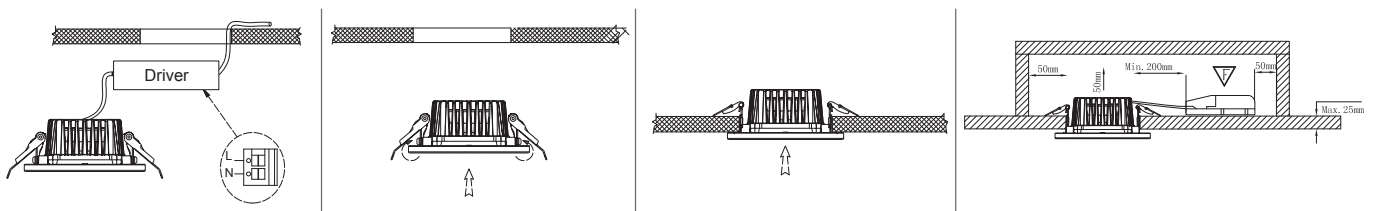

Head office

Malaz - Salahidin Road
P.O Box 1246 Riyadh 11431

Tel : +966 11 4777 700
Fax: +966 11 4789 469

Western Region Office

Tahliya Street
P.O Box 20798 Jeddah 21465

Tel : +966 12 6650888
Fax: +966 12 6633413

Eastern Region Office

King Abdulaziz Street
P.O Box 8492 Dammam 31482

Tel : +966 13 8336509
Fax: +966 13 8329065

ContactUs@noortek.com



www.noortek.com